



SA003

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

сайт: www.emico.nt-rt.ru || эл. почта: ecm@nt-rt.ru

Two industrial actuators are shown side-by-side. The one on the left is yellow, and the one on the right is blue. Both have a cylindrical top cover with a red label that says 'CLOSED'. They have a robust, ribbed body with mounting flanges and a circular port on the side. The blue actuator has an additional side port.

PERFORMANCE




MODEL	MAIN POWER	OUTPUT TORQUE		OPERATING TIME(90°)	RATED CURRENT (A)					DUTY CYCLE		MOTOR	NUMBER OF HANDLE TURNS	Weight
					1 PHASE(AC)			DC						
		Kg.m	N.m	50Hz / 60Hz	24V	110V	220V	12V	24V	S2(min)	S4(%)	W		
SA003	AC 24V	3	30	9sec	1	0.2	0.11	0.8	15	50	18	7.5	1.5	
	DC 12V			10sec										
	DC 24V			7sec										
	AC 110V			12sec										
	AC 220V			12sec										

STANDARD SPECIFICATION

Indicator	Dome type (LED light inside)	Enclosure	Weatherproof enclosure IP67 Nema 4 and 6
Ambient temperature	-20°C to 70°C	Power supply	AC 110/230V 1PH $\pm 10\%$ 50/60Hz, AC24V, DC12V, DC24V
Limit switches	2 Open/Close + Dry contact 2 Open/Close	Travel angle	90°C $\pm 5^\circ$ (Extension : upto 270°)
Manual operation	By L-wrench (6mm hexagon)	Self locking	Provided by means of magnetic in motor
Space heater	2 x 1.5W	Conduit entries	1-PF1/2" (Option : 1-M20x1.5, 1-NPT1/2") Option: 2-PF1/2", 2-M20x1.5, 2-NPT1/2"
Lubrication	Shell Gadus S2 V220 2	Consist of Materials	Aluminium alloy
Surface treatment	Anodizing	External coating	Polyester (TGIC-free)

STANDARD WIRING

CLS : Close Limit Switch (250VAC 5A)
OLS : Open Limit Switch (250VAC 5A)
ACLS : Aux Close Limit Switch (250VAC 5A)
AOLS : Aux Open Limit Switch (250VAC 5A)

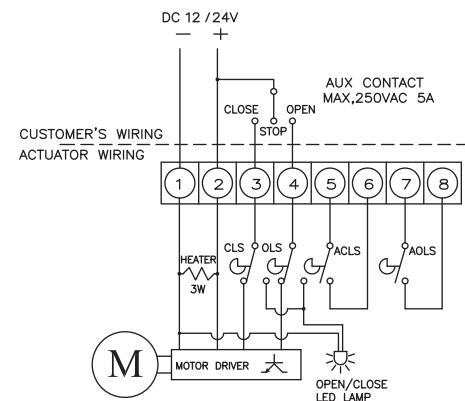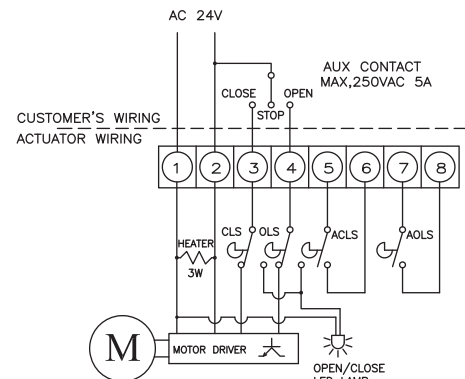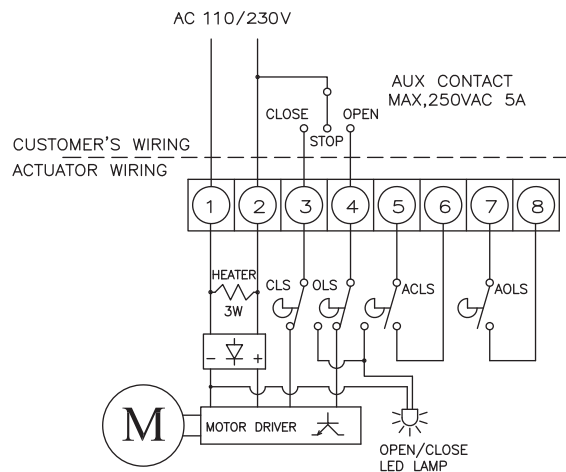

DIMENSION

SA-03	BASE
Cable Entry 1-PF1/2" * Option 1. 1-M20x1.5 2. 1-NPT1/2" Manual Operation Manual De clutch Auto Manual	BASE B.C.D ISO 5211 F03(ø36 M5TAP DP8) ISO 5211 F04(ø42 M5TAP DP10) ISO 5211 F05(ø50 M6TAP DP10) Drive Insert (Option)



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

сайт: www.emico.nt-rt.ru || эл. почта: ecm@nt-rt.ru